

## HIGH-DEFINITION RACK-MOUNTABLE LCD MONITORS



VM-717LCD-1 and VM-719LCD-1

- 17-inch and 19-inch models
- Convenient front panel and OSD controls
- HDMI input, composite video inputs and outputs, VGA input
- Resolution up to 1280 x 1024
- Contrast ratio of 1000 to 1 (VM-717LCD-1) or 800 to 1 (VM-719LCD-1)
- NTSC/PAL
- Desk, Wall or Rack mounting

Vicon's VM-717LCD-1 and VM-719LCD-1 monitors provide clear, bright displays and offer a wide range of mounting options, including desk, rack using the optional rack mounting kit or wall using a standard VESA wall-mount kit. Both models offer a 3D comb-filter with de-interlace capability for high-definition video reproduction. Picture-in-picture (PIP) and picture-by-picture (PBP) display capabilities are also provided.

The monitors are easily operated from front panel buttons. Connectors for power, video, audio and external equipment are located on the bottom of the monitor.

### Ordering Information

Monitor	Model
17" LCD Monitor, 1280x1024 resolution, stereo sound, PIP, NTSC/PAL.	VM-717LCD-1
19" LCD Monitor, 1280x1024 resolution, stereo sound, PIP, NTSC/PAL.	VM-719LCD-1
Rack Mount for VM-717LCD-1, VM-719LCD-1 and VM-620LCD monitor.	VM-7179LCD-RK

	VM-717LCD-1	VM-719LCD-1
Screen Size	17 inches	19 inches
Resolution	1280 x 1024 @ 60 Hz	1280 x 1024 @ 60 Hz
Contrast Ratio	1000:1	800:1
Brightness	300 cd/m <sup>2</sup>	300 cd/m <sup>2</sup>
Aspect Ratio	5:4	5:4
Color Depth	16.7 M	16.7 M
Viewing Angle	160°/160°	160°/160°
Pixel Pitch	0.264 x 0.264 mm	0.294 x 0.294 mm
Response Time	<5 ms	<5 ms
Composite Video In/Out	2/2	2/2
VGA/RGB In (15-pin D-Sub)	1	1
HDMI In	1	1
DVI-D In	0	0
Component Video	0	0
S-Video In/Out	0	0
Audio In/Out (RCA type)	1/0	1/0
PC Stereo In	1	1
Trigger In	1	1
Audio Out	0	0
Languages Supported	English, Spanish, French, German, Italian, Portuguese and Dutch	English, Spanish, French, German, Italian, Portuguese and Dutch
Input Power	100-240 VAC, 50/60 Hz, voltage converter included provides 12 VDC to monitor	100-240 VAC, 50/60 Hz, voltage converter included provides 12 VDC to monitor
Current	5 A @ 12 VDC	4.16 A @12 VDC
Power Consumption	<45 W	<45 W
Mounting	Standard VESA compatible 100 x 100 mm, 19-inch Rack or Desk (stand included)	Standard VESA compatible 100 x 100 mm, 19-inch Rack or Desk (stand included)
Operating Temperature	32° to 104°F (0° to 40°C)	
Operating Humidity	10 to 80% non-condensing	


Data Sheet Number: V198  
Dated: 02/2014

Vicon Data Sheet Part Number: 8009-7198-00-03  
Specifications subject to change without notice.

Vicon and its logo are registered trademarks of Vicon Industries Inc.  
Copyright © 2014 Vicon Industries Inc. All rights reserved.

## VM-717LCD-1

- 3D comb-filter
- De-interlace function
- PIP/PBP
- Optional rack-mount kit
- Built-in speakers
- W: 15.35" (390 mm), H: 13.15" (334 mm), D: 2.64" (67 mm)
- Weight: 12.61 lb (5.8 kg)

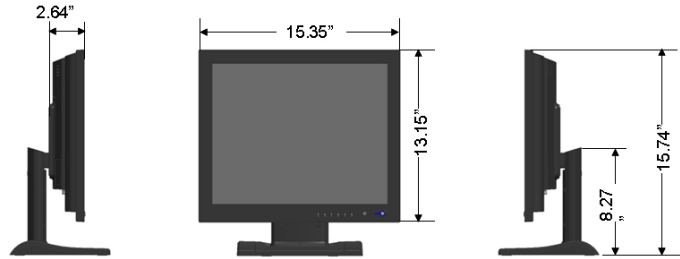

## VM-719LCD-1

- 3D comb-filter
- De-interlace function
- PIP/PBP
- Optional rack-mount kit
- Built-in speakers
- W: 16.89" (429 mm), H: 14.37" (365 mm), D: 2.83" (72 mm)
- Weight: 14.33 lb (6.5 kg)
- Black

