



VIDEOIQ®



## VideolQ® Rialto A4 Analytic Bridge

The bridge to intelligent analytics

The Rialto A4 lowers the per channel cost of analytics deployment by up to 50%, making it easy and cost-effective for companies of all sizes to add intelligent analytics and proactive response capability to any analog video surveillance system. The Rialto A4 is the bridge to intelligent pro-active surveillance.

### Rialto Quick Facts

- ▶ 4 channel analog encoder with 40GB or 160GB onboard Solid State Drive storage.
- ▶ Continuously self-calibrating analytics reduces install time and false positive alarms.
- ▶ Simple, user configurable, rules-based alerts sent to workstations and smartphones.
- ▶ High-density, small footprint video surveillance solution.
- ▶ Compatible with analog, PTZ and thermal cameras.
- ▶ Free VideolQ View™ software for easy analytics management.

### Key Features

**The industry's most advanced, reliable analytics.** VideolQ's award-winning adaptive analytics — based on pattern analysis rather than pixel analysis — are continuously self-calibrating and ready to use right out of the box for easy set-up and quick installation. With each object detected they become more accurate, reducing false alarms and ongoing maintenance while allowing security personnel to focus only on events of high interest.

**The most scalable solution for new and existing systems.** Now you can add actionable, system-wide intelligence to most existing analog, thermal and PTZ camera networks. Designed to scale from two to multiple cameras, a VideolQ solution does not require users to reengineer infrastructure. The VideolQ architecture is well-suited for hard to reach remote locations, difficult lighting situations and remote monitoring.

**On-board storage eliminates additional infrastructure.** Unlike other video surveillance systems, the Rialto A4 utilizes Solid State Drive (SSD) distributed on-board storage. SSD means you won't stream video over a network to a central server, reducing network traffic and bandwidth consumption by over 90%.

**System-wide notification enables faster response.** The Rialto A4 is a cost effective way to add video remote monitoring services to your surveillance solution. And it is integrated with leading VMS management systems too. User-configurable, rules-based alerts trigger automatic notifications that can be sent to multiple VMS users and emails simultaneously.

## Enhanced Features

<b>Control PTZ Cameras</b>	RS-485 BUS supports multiple PTZ cameras on the same control chain.
<b>Thermal Camera Use</b>	VideolQ's analytics work well with color, B/W or thermal camera analog video feeds.
<b>Audio Channels</b>	Multiple Audio inputs and outputs allow for flexibility in designing a system adapted for alarm response.
<b>Onboard Storage</b>	Every device comes with storage, eliminating the requirement for extra equipment.
<b>4 Channel Layout</b>	Single chassis supports multiple cameras, including a mix of Day/Night, Thermal, PTZ, etc.
<b>Power Options</b>	12VDC, 15Watts.

## Rialto A4 Analytic Bridge — Specifications

### Encoder Specifications

- Protocol pass-through to PTZ cameras — RS485
- PTZ Addresses: 0 - 255
- Pelco P or D protocol
- Software PTZ control from View software or USB joystick
- Video input (4): NTSC or PAL via BNC connector

### Storage Specifications

- Typical storage time for 40 GB: 4-5 Days
- Typical storage time for 160 GB: 3-4 Weeks

### Video Compression Specifications

- H.264 compression, MJPEG for mobile
- Frame Rate: Up to 30 frames per second in all resolutions
- Triple Stream Encoding: Alarm events at high quality, resolution and frame rate. Continuous recording at lower quality, resolution and frame rate (selectable).
- MJPEG stream for mobile devices
- Visual alarm indicators (colored boxes around objects detected) can be turned on or off at the display
- Programmable pre-alarm video recording

### Networking and Communications

- Ethernet 10/100 BaseT — RJ45 connector
- Protocols: HTTP, HTTPS, TCP, RTSP, UDP, RTP, DHCP, NTP, DNS
- ZeroConf auto IP discovery of cameras
- Security: Multiple user access levels with password protection, IP address filtering, and HTTPS encryption
- Serial communications: RS-232 or RS-485 (auto-detected) — terminal block
- Web browser access to encoder via built-in web server

### Continuously Self-Calibrating

- Powerful VideolQ analytic engine with rich library of behaviors
  - Fence-line and Perimeter Crossing Detection
  - Area Protection
  - Direction of Travel Alerts
  - Crowd Detection
  - Loitering and Dwell Time Alarms
  - Missing Object Detection
  - Cross Camera Object Search
- Automatic alarm reporting with highlighted video clip
- Fully automated calibration and tuning: delivering the highest level of accuracy while reducing installation time and maintenance

### Alarm and Audio Inputs and Outputs

- 2 Audio inputs, 2 Audio outputs via two 3.5mm jacks
- Audio compression: G.711
- Audio streaming live two-way: full duplex
- Audio recording — alarm or continuous
- Four alarm inputs — TTL
- Four Alarm outputs — Optical relay, 20mA max, programmable normally open or normally closed
- One alarm relay output — SPST, 400mA max, programmable normally open or normally closed

### Diagnostics

- Loss of communications trouble alert
- Hard drive failure alert
- Scene change trouble alert
- Self-diagnostics built in

### Power

- 12VDC: 15W max
- 10 watts typical
- AC/DC adapter supplied
- Optionally powered via Terminal Block

### Environmental

- Operating Temp: 0°C to 50°C (32°F to 122°F)
- Storage Temp: -20°C to 85°C (-4°F to 185°F)
- Humidity: 20-80% RH (non-condensing)

### VideolQ View™ Software System Requirements


- CD-ROM with View software included with camera
- Core-2 Duo 2.0 GHz CPU or higher
- 2 GB RAM
- Windows XP, Vista, or Windows 7

### Dimensions and Weight

- (L x W x H): 8.25" x 4.5" x 2.0"
- (21 cm X 11.4 cm X 5.10 cm)
- Weight: 1.8 pounds (816 grams)

### Warranty

- 2-years, parts and repair labor

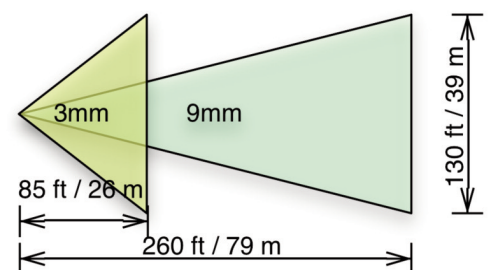

### iCVR HD & D1 Cameras and Encoders

- FOV Width: 130 feet / 39 meters
- Lighting: 1 Lux on target per 100' of distance from camera

VideolQ, Inc.  
213 Burlington Road  
Bedford, MA 01730

888 251-1758 | 781 271-3069  
info@videolq.com



VIDEOIQ®

www.videolq.com

© 2012 VideolQ, Inc. All rights reserved. VideolQ is a registered trademark and the VideolQ logo is a trademark of VideolQ, Inc. All other trademarks or registered trademarks are the property of their respective owners. The iCVR is covered by numerous patents: Multiple patents pending cover the iCVR, video analytics and hard drive life extension, including US patents: 7,627,171; 7,504,942; 7,358,976, and numerous US and International pending patents.