

MAIN FEATURES

- With joystick and jog shuttle
- Perfect integration with cctv control systems
- USB powered
- Easy to install and use
- Functions determined by the controlled application
- For right- and left-handed operators

DESCRIPTION

The DCZ keyboard comes with jog shuttle, joystick 38 backlit keys, alarm buzzer, and allows the management of CCTV applications from a PC, via USB connection.

It can be easily integrated with control systems using basic programming techniques without an SDK.

The keys are recognized in any combination configured by the programmer: the application receives an event message whenever a key is pressed or released.

The DCZ keyboard can control PC applications already on the market, emulating a 4-axis 32 keys HID joystick. It can also be used together with ordinary PC peripheral devices such as keyboards, mouse, joysticks or other accessories.

It is USB powered and so requires only one cable.


The use of the keyboard can be made even more intuitive by personalizing the captions on the key panel: the user can easily personalize the key panel by printing the pre-cut sheets, supplied with the keyboard.

The keyboard can be turned round so that both right- and left-handed users can use all the functions with ease.


This simple, user-friendly and fully implementable DCZ keyboard allows a comfortable and intuitive management of cctv applications from PC.



DCZ



THE USER CAN EASILY PERSONALIZE AND PRINT SEVERAL PRE-CUT SHEETS THAT ARE INCLUDED

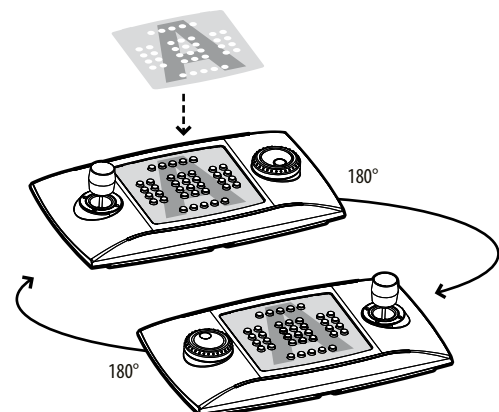

THE KEYBOARD CAN ALSO BE TURNED ROUND SO THAT BOTH RIGHT- AND LEFT-HANDED USERS CAN USE ALL THE FUNCTIONS WITH EASE

DCZ

TECHNICAL DATA

GENERAL

38 backlit rubber keys

Alarm buzzer

Supplied with instructions manual, installation driver, pre-cut sheets, plastic protecting layer

MECHANICAL

Dimensions: 379x89x224mm (15x3.5x8.8in)

ELECTRICAL

Powered via USB port

Consumption: 350mA max

COMMUNICATIONS

USB 2.0

PROTOCOLS

Dedicated Virtual Com Port protocol

Joystick HID 4-axis 32 key emulation

OPERATING SYSTEM

Windows™ XP, 2000, Vista, Windows 7

Linux™ and compatible operating systems

ENVIRONMENT

Indoor

Operating temperature: 0°C / +45°C (+32°F / +113°F)



CERTIFICATIONS

EN55022 Class B, EN50130-4, EN61000-6-3, EN60950-1

FCC part 15 Class B

ACCESSORIES

OPACDCZ Cut sheets for printing personalized forms and transparent protective plastic sheeting

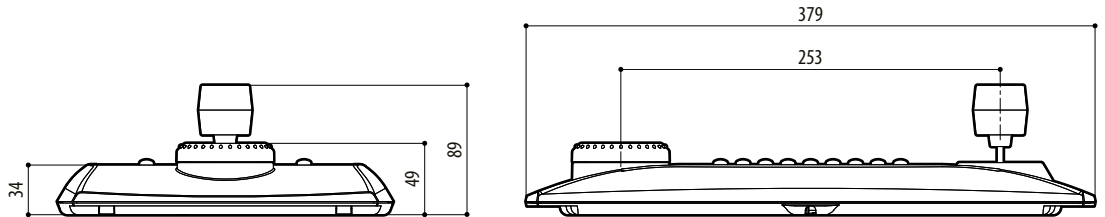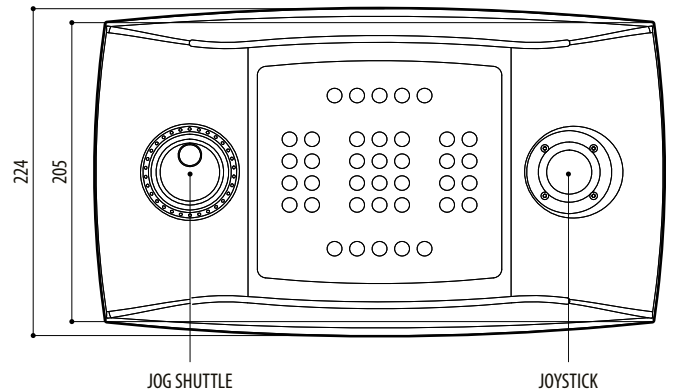

DCZ

mm 1:5

PACKAGE

Code	Unit weight		Package weight		Package dimensions (WxHxL)		Master carton unit
	kg	lb	kg	lb	cm	in	
DCZ	1.4	3.0	1.9	4.2	42.5x27.0x17.5	16.7x10.6x6.9	-