

AP-GIC-010A-030


1xGE IEEE 802.3at PoE Injector




Technical Specifications

| | | | |
|---|--------------------------|-----------------------------|--|
| Model | AP-GIC-010A-030 | PoE Output Power | 30W |
| IP Camera Compatibility | | 802.3at Standard Compatible | Yes |
| Video Resolution | Megapixel/D1/VGA | 802.3af Standard Compatible | Yes |
| Video Compression | MJPEG/MPEG-4/H.264/H.265 | Over Current Protection | Supported |
| Compatible Camera List | VIVOTEK Network Cameras | Circuit Shorting Protection | Supported |
| Ethernet | | Power Pin Assignment | 1/2(+), 3/6(-) |
| Gigabit Ethernet (RJ45) | 1 | PoE PD Auto Detection | Supported |
| Standards | | General | |
| IEEE 802.3 10-BASE-T (Ethernet) | Supported | LED Indicators | Power, PoE |
| IEEE 802.3u 100-BASE-TX (Fast Ethernet) | Supported | Power Input | 100~240VAC / 50~60Hz |
| IEEE 802.3ab 1000-BASE-T (Gigabit Ethernet) | Supported | Power Consumption | 35W |
| IEEE 802.3af Power over Ethernet | Supported | Dimensions | 146 (L) x 64 (W) x 42 (H) mm |
| IEEE 802.3at Power over Ethernet | Supported | Weight | 0.2 kg |
| Transmission Media | | Operating Temperature | 0°C ~ 50°C (32°F ~ 122°F) |
| 10Base T | Cat. 3, 4, 5 UTP/STP | Storage Temperature | -20°C ~ 70°C (-4°F ~ 158°F) |
| 100Base TX | Cat. 5, 5e UTP/STP | Humidity | Operating: 10~90% (Non-condensing) Storage: 10~90% (Non-condensing) |
| 1000Base T | Cat. 5e, 6, 7 UTP/STP | Safety Certifications | CE, C-Tick, FCC, VCCI, LVD |
| PoE Function | | Accessory | |
| Number of PoE Out Ports | 1 | Included Accessories | Power cord, QIG |

Dimensions

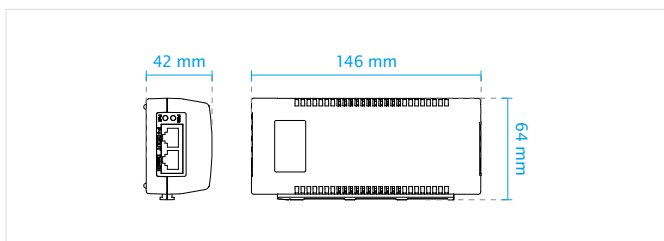

Application Diagram

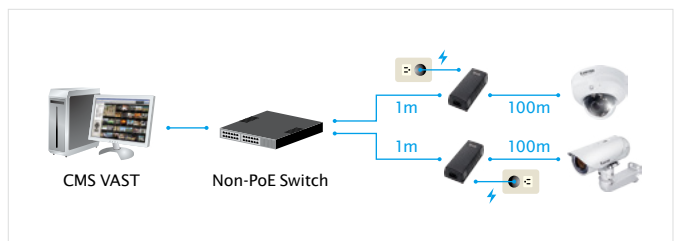

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved. Ver. 5