




# AW-IHS-0203

## Industrial Gigabit Media Converter SFP


### Technical Specifications

Model	AW-IHS-0203	1000Mbps	1,488,000 pps
<b>IP Camera Compatibility</b>		<b>Transmission Media</b>	
Video Resolution	Megapixel/D1/VGA	10Base T	Cat. 3, 4, 5 UTP/STP
Video Compression	MJPEG/MPEG-4/H.264/H.265	100Base TX	Cat. 5, 5e UTP/STP
Compatible Camera List	VIVOTEK Network Cameras	1000Base T	Cat. 5e, 6, 7 UTP/STP
<b>Ethernet</b>		<b>General</b>	
Gigabit Ethernet (RJ45)	1	LED Indicators	Power, LAN, SFP
Gigabit Ethernet (SFP)	1	Power Input	Redundant Dual 18V-36VAC or 12V-56VDC Power Input Removable Terminal Block
<b>Standards</b>		Power Consumption	3W
IEEE 802.3 10-BASE-T (Ethernet)	Supported	Housing	IP40 Design, High Graded Aluminum
IEEE 802.3u 100-BASE-TX (Fast Ethernet)	Supported	Installation	DIN-rail Mounting and Wall Mounting
IEEE 802.3ab 1000-BASE-T (Gigabit Ethernet)	Supported	Dimensions	103.5 (L) x 31.8 (W) x 90.5 (H) mm
IEEE 802.3x Flow Control (Full-Duplex Flow Control)	Supported	Weight	0.14 kg
<b>Ethernet Performance</b>		Operating Temperature	-40°C ~ 75°C
MAC Address	1 K	Storage Temperature	-40°C ~ 85°C
Buffer Memory	128 KB	Humidity	Operating: 5~95% (Non-condensing) Storage: 5~95% (Non-condensing)
Transmission Method	Store and Forward	Safety Certifications	CE, C-Tick, FCC, VCCI, LVD
Jumbo Frame	9 KB	<b>Accessories</b>	
Auto-MDI/MDI-X, Auto-Negotiation	Supported	Optional Accessories	
<b>Filtering/Forwarding Rates</b>		Industrial SFP Transceiver SFP-1000-MM85-XSI: MMF, 0.5 km, -40°C ~ 85°C SFP-1000-MM13-02I: MMF, 2 km, -40°C ~ 85°C SFP-1000-SM13-10I: SMF, 10 km, -40°C ~ 85°C SFP-1000-SM13-40I: SMF, 40 km, -40°C ~ 85°C	
10Mbps	14,880 pps		
100Mbps	148,000 pps		

### Dimensions

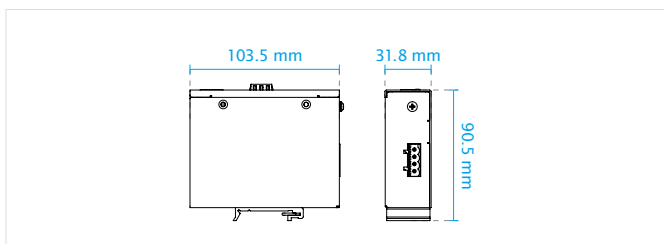

### Application Diagram

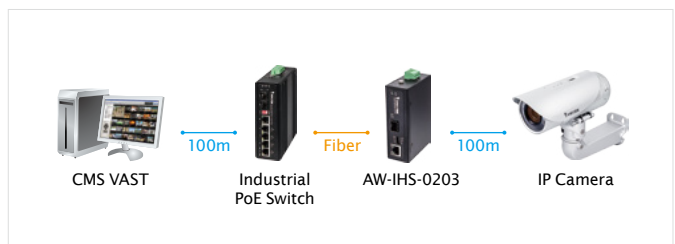

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved. Ver. 4