



Features

- Single zone
- Dual pipe air sampling
- 0.001% to 20% obscuration/m (0.0003% to 6.10% obscuration/ft)
- 4 Alarms - Alert, Action, Fire 1, Fire 2
- 2 x 100 m (2 x 328 ft) sampling pipe
- Enhanced performance aspirator
- Ethernet TCP/IP
- RS232 and RS485 Modbus
- 5 relay outputs and expandable
- Optional relay module and 4 to 20 mA analog output module
- Area coverage of up to:
 - 2000 m² (21 500 ft²) for VdS installations
 - 850 m² (9150 ft²) for UL installations

The ICAM IFT-P detector is an air-sampling system with an alarm sensitivity range from 0.001% to 20% obscuration/m (0.0003% to 6.10% obscuration/ft). This detector is classified as a Very Early Warning Smoke Detector that can reliably detect fire at an early stage, and low to high concentrations of smoke over an area of up to 2000 m² (21 500 ft²).

The detector is configurable for a variety of environments, providing an ideal fire detection solution for telecommunications and IT facilities, and heavy industrial environments such as chemical plants, factories, warehouses and mining facilities.

How it works

The IFT-P detector draws air through sample holes in a pipe network, then filters and analyzes the sample in a laser detection chamber. Individually programmable alarm states (Alert, Action, Fire 1 and Fire 2) are shown on the display, which contains four alarm LEDs and an OK/Fault LED. Dedicated output relays also provide interfaces for each alarm state and device faults.

Product Features

Programming and Configuration

RS232, RS485 and TCP/IP communication interfaces are available to connect to Xtralis Configuration and Fire System Management software packages: Xtralis VSC and Xtralis VSM4. RS485 interfaces also allow connections to programming devices and remote displays, and the TCP/IP Ethernet interface can provide access to an email messaging service.

Inputs and Outputs

The IFT-P detector supports a maximum of three optional modules, which provide the detector with additional programmable output relay interfaces, and 4 to 20 mA analog outputs.

Aspiration and Flow Sensing

The aspirator is a 2000 Pa high pressure and high volume fan, which provides superior detection times over long pipe lengths and reliable detection in high air flow environments. Airflow in each pipe is monitored by a dual element thermal sensing system, with airflow faults indicated on the display and to monitoring equipment.


Listings/Approvals

- FM
- UL
- ULC
- VdS
- CFE
- CE - EMC and CPD
- EN54-20
 - Class A (12 holes / 0.04% obs/m)
 - Class B (36 holes / 0.04% obs/m)
 - Class C (36 holes / 0.1% obs/m)

Classification of any configuration is determined using ASPIRE2.

Regional approvals listings and regulatory compliance vary between ICAM models.

Dimensions

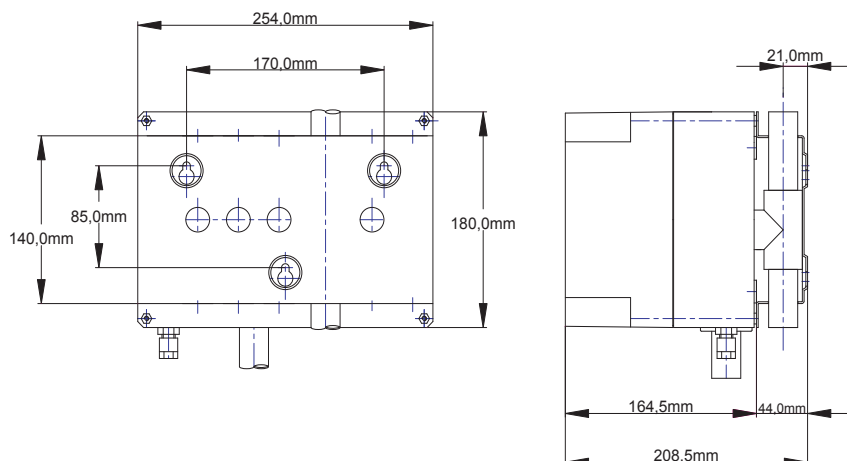

Ordering Information

IFT-P 24 VDC with TCP/IP
 4 Channel Relay module¹
 8 Channel Analog Output module (4 to 20 mA)¹

IFT-PT
 01-E606-02
 01-E624-01

Specifications

Supply Voltage:
 Nominal 24 VDC

Supply Current:
 500 mA (min) to 1.2 A (max)

Aspirator:
 2000 Pa Centrifugal air pump

Dimensions (WHD):
 254 mm x 180 mm x 165 mm
 (10.0 in. x 7.1 in. x 6.5 in.)

Operating Conditions: *
 Ambient:
 0 to 39°C (32 to 103°F)
 Tested to:
 -10 to 55°C (14 to 131°F)
 Sampled Air:
 -20 to 60°C (-4 to 140°F)
 Humidity:
 10 to 95% RH (non-condensing)

Sampling Pipe Size:
 Outer Diameter: 25 mm (1 in.)

Sampling Network:
 Zones: 1 Fire detection zone
 Pipe Length: 2 x 100 m (2 x 328 ft.)

Alarm Sensitivity Range:
 0.001% to 20% obs/m
 (0.0003% to 6.10% obs/ft)

Alarm Settings:
 Alarm levels: Alert, Action, Fire 1 and Fire 2
 Alarm delays: 0 to 60 seconds
Individually programmable for each level

IP Rating:
 IP65

Filtration:
 Field exchangeable dual stage filter

Flow Monitoring:
 Twin thermal element

Relay Outputs:
 4 alarm relays, 1 fault relay, 1 Amp
 changeover
 Rating 1A @ 30 VDC, NO/NC

Communication:
 RS232, RS485 Modbus
 Ethernet TCP/IP

Event Log:
 Up to 20,000 events stored

Notes:

1. Please contact your nearest Xtralis office for approvals status.

* Product UL listed for use from
 0 °C to 38 °C (32 °F to 100 °F)

www.xtralis.com

The Americas +1 781 740 2223 Asia +852 2916 8894 Australia and New Zealand +61 3 9936 7000
 Europe, Middle East & Africa +44 1442 242 330

The contents of this document are provided on an "as is" basis. No representation or warranty (either express or implied) is made as to the completeness, accuracy or reliability of the contents of this document. The manufacturer reserves the right to change designs or specifications without obligation and without further notice. Except as otherwise provided, all warranties, express or implied, including without limitation any implied warranties of merchantability and fitness for a particular purpose are expressly excluded.
 This document includes registered and unregistered trademarks. All trademarks displayed are the trademarks of their respective owners. Your use of this document does not constitute or create a licence or any other right to use the name and/or trademark and/or label.
 This document is subject to copyright owned by Xtralis AG ("Xtralis"). You agree not to copy, communicate to the public, adapt, distribute, transfer, sell, modify or publish any contents of this document without the express prior written consent of Xtralis.
 Doc. no. 16304_08

Part no. 29319