


Type drx300-II/400-II/400d.c. Telemetry Receiver

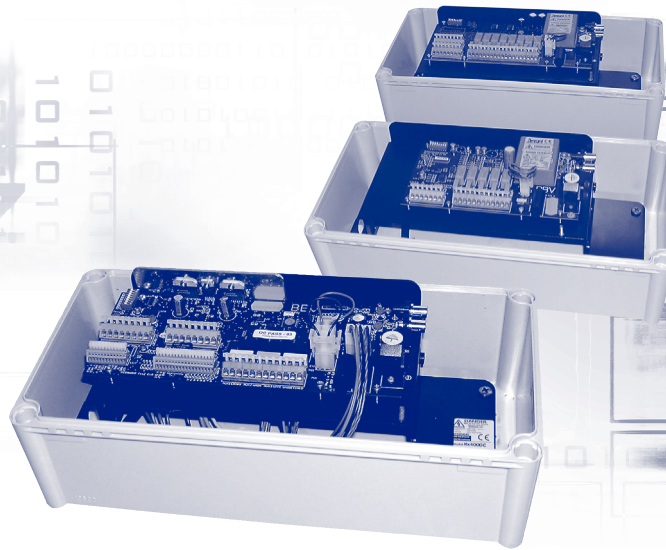

The drx series receivers are ideal for controlling pan, tilt and zoom Cameras for a wide range of applications. Receivers are available as standard in IP67 enclosures or in PCB format.

Type drx300 The type drx300 receiver controls pan, tilt and lens functions with a single selectable auxiliary output. Telemetry signals are via the coax or twisted pair 20mA current loop.

Type drx400 The type drx400 receiver is similar to the drx300 but has 16 presets simply set up from the control unit and 4 auxiliary outputs.

Type drx400d.c. The type drx400d.c. receiver is a d.c. unit with up to 16 programmable presets depending on transmitter, with 2 patrol modes and 12V d.c./230V a.c. camera outputs.

benefits

- OPERATES OVER 500M ON STANDARD RG59 COAX CABLE
- BUILT-IN LAUNCH AMPLIFIER WITH GAIN AND LIFT CONTROLS FOR CABLE LOSS COMPENSATION
- 20MA CURRENT LOOP CONTROL OPTION
- IP67 ENCLOSURE


Type drx400d.c

- 8 LOCAL ALARM INPUTS CALL UP PRESETS 1-8, 1 ALARM OUTPUT
- D.C. OUTPUT FOR PAN & TILT MOTOR BRAKES
- ALARM OUTPUT ACTIVATED EITHER ON ALARM OR DELAYED UNTIL REACHES PRESET POSITION

build options

- /24 = 24VA.C. OUTPUT (DRX300 & 400)
- /PCB = PCB ONLY OPTION FOR DRX300 AND DRX400

Type drx300-II/400-II/400d.c. Telemetry Receiver

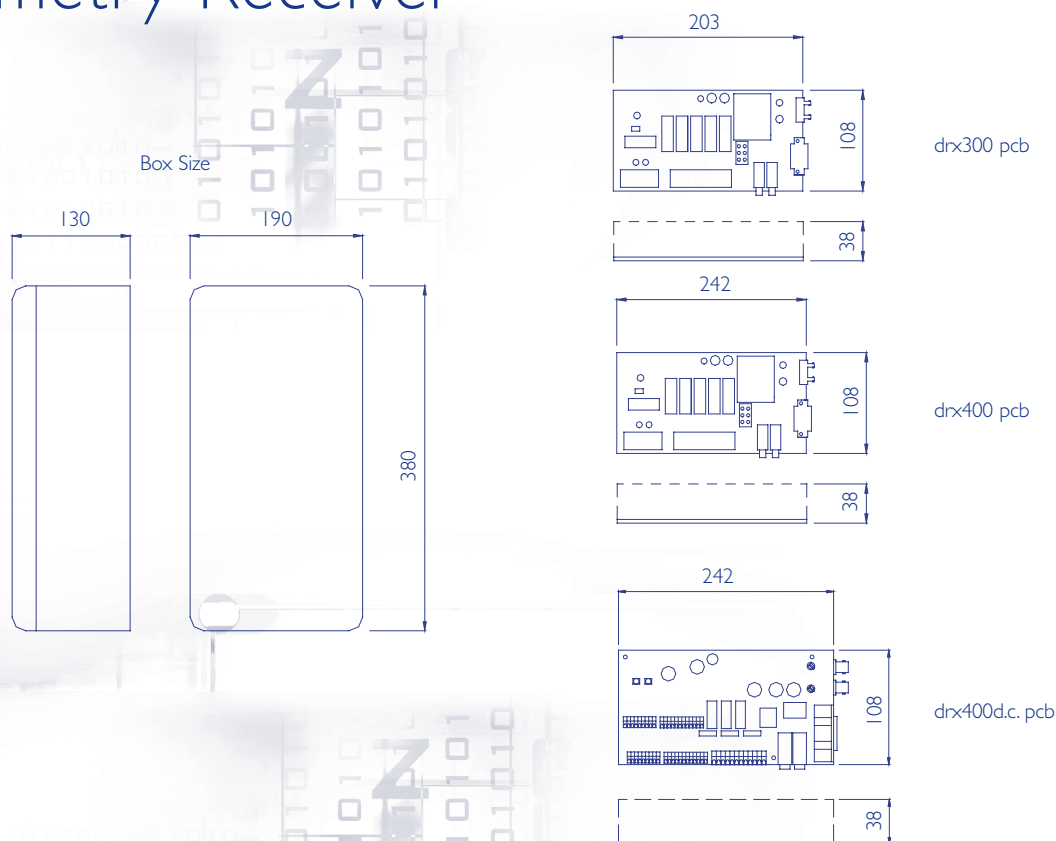

All Dimensions in millimetres

Specification

	TYPE DRX300	TYPE DRX400	TYPE DRX400D.C.
POWER SUPPLY	230 V, 50 Hz or 110 V, 60 Hz (230 V Std.) IEC connector provided		
MAX LOAD	5 Amp at 230V		
CURRENT DRAW	10VA maximum		100VA maximum
VIDEO INPUT	1 V P-P 75W terminated input via BNC socket		
VIDEO OUTPUT	1 V P-P to 4V P-P adjustable with H.F. lift		
PRESET	No presets	16 programmable presets depending on transmitter	
TEMPERATURE	-10°C +40°C		

PLEASE CHECK THE WEBSITE FOR LATEST DEVELOPMENTS

FOR FURTHER INFORMATION PLEASE CONTACT

Dedicated Micros UK	11 Oak Street, Swinton, Manchester, M27 4FL, UK Tel: +44 (0) 161 727 3200 Fax: +44 (0) 161 727 3300.
Dennard UK	Tel: +44 (0)1252 614884 Fax: +44 (0)1252 626013 e-mail: sales@dennard-cctv.com
Dedicated Micros USA	14434 Albemarle Point Place, Suite 100, Chantilly, Virginia 20151 USA Freephone: 800 864 7539 Tel: +1 703 904-7738 Fax: +1 703 904-7743 and 23456 Hawthorne Blvd. Suite 100, Torrance, CA 90505, Tel +1 310 791-8666 Fax: +1 310 791-9877.
Dedicated Micros Europe	Neckarstraße 15, 41836 Hückelhoven, Germany Tel: +49 243 352 580 Fax: +49 24 33 52 58 10 e-mail: infobox@dmicros.com
Dedicated Micros Belgium	Joseph Chantraineplantsoen 1, 3070 Kortenberg, Belgium Tel: +32 2751 3480, Fax: +32 2751 3481 e-mail: dmbenelux@dmicros.com
Dedicated Micros Ltd. Slovenia	Delavska cesta 26, 4208 Sencur-Slovenija Tel: +386 (4) 279 18 90, Fax: +386 (4) 279 18 91 e-mail: dmslovenia@dmicros.com
Dedicated Micros France	9-13 rue du Moulinet, 75013 Paris, France Tel: +33 1 45 81 99 99, Fax: +33 1 45 81 99 89. e-mail: dmfrance@dmicros.com
Dedicated Micros Asia	16 New Industrial Road, #03-03 Hudson Techno Centre, Singapore 536204 Tel : +65 62858982 Fax : +65 62858646.
Dedicated Micros Australia	5/3 Packard Avenue, Castle Hill, NSW 2154, Australia Tel: +612 9634 4211 Fax: +612 9634 4811.
Dedicated Micros Malta	UB 2, San Gwann Ind. Est., San Gwann, Malta Tel: +356 21483 673 Fax: +356 21449 170.
Dedicated Micros Middle East	Building 12, Suite 302, P.O.Box 500291, Dubai Internet City, Dubai, United Arab Emirates Tel: +971 (4) 390 1015, Fax: +971 (4) 390 8655.

The manufacturer reserves the right to change the specification without notice.

All trademarks are courtesy of registered owners.
DM is a trademark of Dedicated Microcomputers Group Ltd.
REF: DM01/05



DEDICATED MICROS

www.dedicatedmicros.com

Doc 74 0260