


Double the Protection in One Device

The EV-DW4927 is ideal for those installations where glassbreak detectors are not recommended. Not only can it detect the impact caused by breaking glass or forced entries, it can also detect openings and closings. That's double the protection in one device. With the adjustable sensitivity, each installation can be fine-tuned to ensure reliable coverage without false alarms. The EV-DW4927 is built with reliable 433 MHz technology and is compatible with all current DSC wireless receivers.

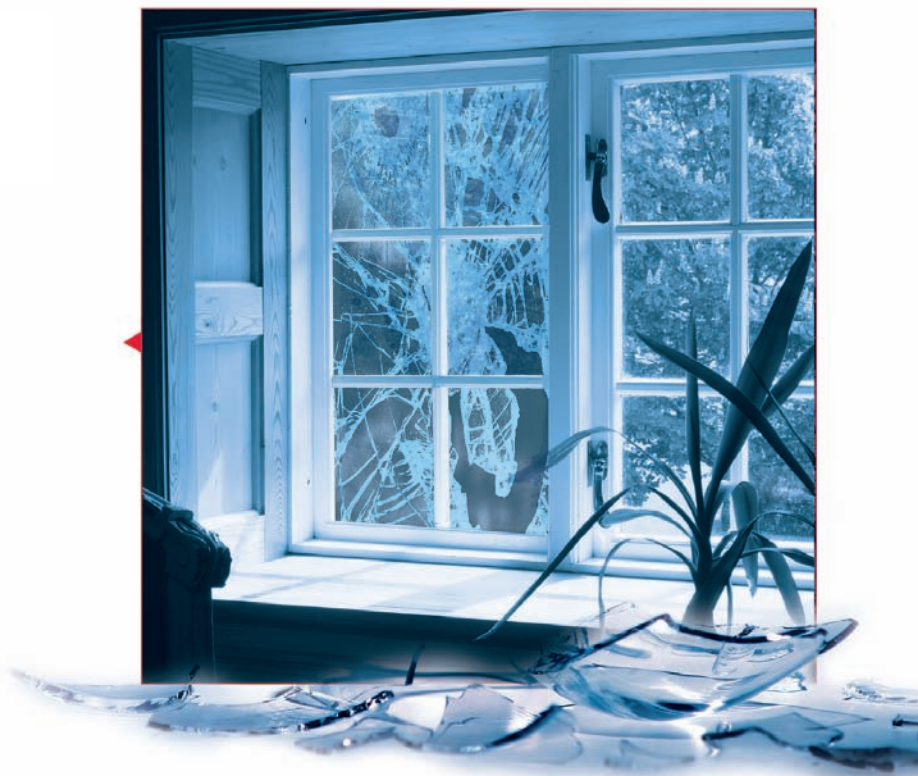

Product Features:

- ▶ Electro-mechanical shock sensor
- ▶ Adjustable sensitivity
- ▶ Audible and visual pre-alert
- ▶ Built-in reed switch and case tamper
- ▶ Functions as a door/window contact
- ▶ 5/8" (16 mm) maximum magnet gap
- ▶ Two serial numbers for independent operation
- ▶ Long-life lithium battery included
- ▶ Mounting plate included
- ▶ Reliable 433 MHz technology
- ▶ FCC/IC listed

Wireless Shock Sensor with Built-in Door/Window Contact

EV-DW4927

Quicker Installations

The EV-DW4927 includes double-sided tape for quick and easy mounting to virtually any surface. Also helping to make installations as effortless as possible is the easy-to-open case that provides access to the battery and allows sensitivity adjustments to be made without using tools.

Value Added

With the EV-DW4927 you get two functions in one. By mounting the device on a window frame and the supplied magnet on the window, the alarm system is able to detect the shock produced by a forced entry as well as report when the window is opened or closed.

Programming Flexibility

To ensure flexibility, the easy-to-program EV-DW4927 features two separate serial numbers: one for the shock detection function and the second for door/window contact operation.



Ordering Information:
EV-DW4927 Wireless Shock Sensor with Built-in Door/Window Contact

Compatibility

The EV-DW4927 is compatible with the following receivers:

PowerSeries™ Wireless Receivers
RF5132-433/PC5132-433 all versions and RF5108-433

MAXSYS® Wireless Receiver PC4164-433

PowerSeries RFK Keypads
(RFK5500/RFK5501/RFK5516/RFK5508)

Fixed-Message LCD Keypad with Integrated
Wireless Receiver RF5501-433

Envoy™ LCD Self-Contained Wireless Security
System NT9005

Specifications

- Dimensions 2 15/16" x 1 11/16" x 1"
(75 mm x 43 mm x 25 mm)
- Battery CR123 (3 V Lithium)
- Battery Life 5-8 Years (Typical)
- Operating Temperature -10 to 50 °C (14 to 122 °F)
- Operating Humidity 5% to 93% RH

P/N 30000620 R001 Printed in Canada

Distributed by:



For product information
www.dsc.com
Product specifications and availability subject to change without notice. Certain product names mentioned herein may be trade names and/or registered trademarks of other companies.
©2006 2006-10