


# Kawaden CCTV LENS

## BKV0650DIRF

**12X 6-50mm Board Lens with IR Cut Filter  
for Day and Night use**

**6-50mm F1.6-360 IR Varifocal Lens  
for Board Mount Camera  
Φ 14mm Straight Mount  
DC Auto Iris IR Cut Filter  
ED glass employed**

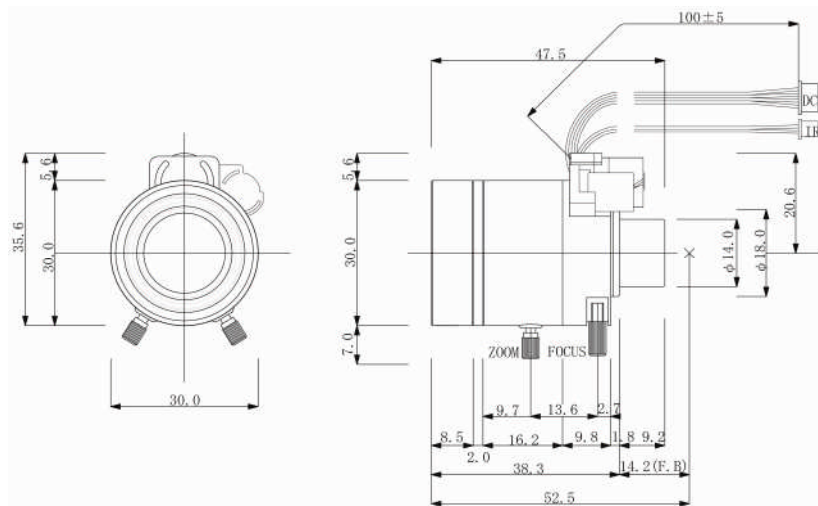

|                      |                               |                   |                              |                      |
|----------------------|-------------------------------|-------------------|------------------------------|----------------------|
| Model No.            | BKV0650DIR                    | M.O.D.            | 0.3m                         |                      |
| Focal Length         | 6 - 50 mm                     | Dimensions        | 30(W) x 35.6(H) x 47.5(L) mm |                      |
| Max. Aperture Ratio  | 1:1.6-360                     | Weight            | 35g                          |                      |
| Image Format         | 1/3 inch                      | Driving Coil      | 190 Ω ± 10% (20 ° C)         |                      |
| Mount                | Board Mount<br>φ14mm Straight | Operating Voltage | Close to Open                | Less than 4.0V       |
|                      |                               |                   | Open to Close                | More than 0.5V       |
| Operation            | Iris                          | DC Auto Iris      | Dumping Coil                 | 855 Ω ± 10% (20 ° C) |
|                      | Focus                         | Manual            | Operating Temperature        | -10°C - +50°C        |
|                      | Zoom                          | Manual            | Wave Length Covered          | 400nm - 900nm        |
| Angle of View (1/3") | D                             | 54.6° - 7.1°      |                              |                      |
|                      | H                             | 43.9° - 5.7°      |                              |                      |
|                      | V                             | 33.2° - 4.3°      |                              |                      |

Specifications are subject to change without notice