

P E C A N

Professional CCTV Products



PC80HLT Vandal-resistant Day/Night Bullet Camera


- IP66 weatherproof exterior housing
- 1/3" Sony Super HAD CCD
- Mechanical IR cut filter
- 12v DC/24v AC auto-sensing operation
- Integral IR lighting coverage to 30m
- Integral heating for use in cold climates
- Fan-cooled for use in hot climates
- Secure, discreet cable management
- 3.7-12mm Varifocal aspherical lens - F1.0
- Dip switch controls

APPLICATIONS

Ideal for installations where overt surveillance is required.

☎ 01279 419913
www.pecancctv.co.uk

PC80HLT Dimensions (mm)

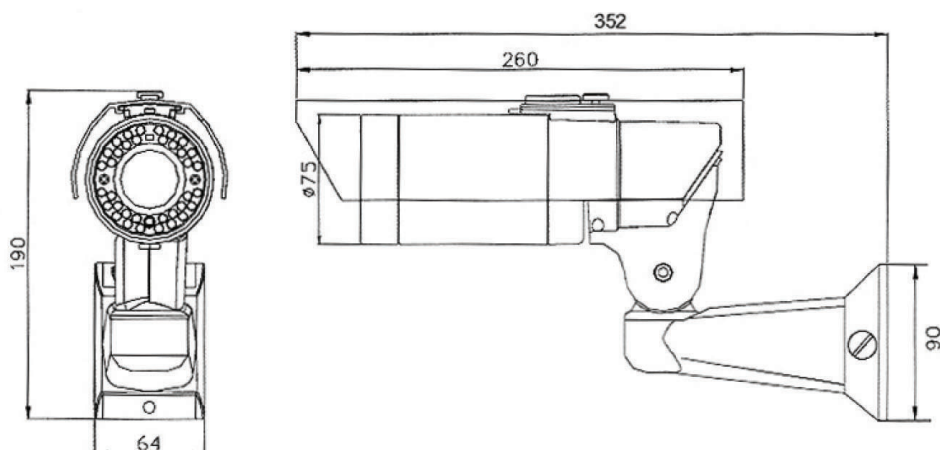

Technical data

Video output	1.0V p-p composite video 75 Ohms
Exposure control	Electronic
Lens	3.7-12mm
Power consumption	1050 mA @ 12v DC with heater & LEDs ON
Operating temperature	-50 to +50°C (with heater)
Operating humidity	30%-90%
Weight	1500g

For critical viewing applications additional illumination may be required.

Mode	TDN
Sensor	1/3" PAL
Resolution	550TVL
Sensitivity @ F1.0	Col/Mono 0.1/0.0 Lux
Power consumption	Max 1050 mA

Power connection	
Red	= 12v DC(+)/24v AC (-)
Black	= 12v DC (-)/24v AV (-)

Signal	
Video signal is via a female BNC connector	

Order information

	Code
Vandal-resistant day/night bullet camera	PC80HLT

We recommend the use of a 1000 mA power supply with this item PSU1210R

Whilst every effort has been made to ensure the accuracy of the information provided, no liability can be accepted for any errors or omissions. All dimensions are approximate. Stortech Electronics Ltd reserves the right to alter the specification and introduce changes without prior notice.

PECAN CCTV

Tel: 01279 419913

Email: sales@pecancctv.co.uk

Fax: 01279 419925

www.pecancctv.co.uk