



TAC MicroNet BACnet™ VAV Controllers

- The TAC MicroNet BACnet VAV controllers' sequence of operation and BACnet image are fully programmable using WorkPlace Tech Tool. The controllers can be applied to all common VAV configuration and reheat control strategies.
- Capability to function in standalone mode or as part of a BACnet building automation network.
- Air balancing performed via BACnet using VAV Flow Balance software through direct connection or over the network.
- Integral MS/TP jack for direct connection of PC with WorkPlace Tech Tool and Flow Balance tool.
- Integrated packaging with actuator, pressure transducer, and controller.
- Integral actuator features manual override and travel limit stops for easy set up and adjustment.
- Plenum-rated enclosure.
- DIP switch addressable.
- Isolated RS-485 transceiver for MS/TP communications.
- MS/TP baud rate selection from 9.6 up to 76.8 kbaud.
- LED indication of MS/TP communication activity and controller status.
- Firmware upgradeable over the network.
- Damper position feedback to the BACnet BAS via integral hall effect sensor.
- Stable flow control down to 0.004 in. W.C. differential pressure.

The TAC I/A Series® MicroNet™ BACnet™ VAV (Variable Air Volume) Controllers are interoperable controllers with native BACnet MS/TP communications support. All models incorporate: an integral actuator with manual override; an integral, patented, pressure transducer; three universal inputs; Sensor Link (S-Link) support; LED status indication; and over-the-shaft damper mounting. See the model chart (Figure-1) for optional features.

When programmed using WorkPlace Tech Tool, the controllers provide a wide range of control strategies for pressure-dependent and pressure-independent terminal boxes with or without reheat capabilities.

The TAC MicroNet BACnet VAV controllers can function either in a standalone mode or as part of a BACnet building automation system (BAS) network.

Table-1 Model Chart.

Model	Description	Inputs and Outputs		
		UI	UO	DO (Triac)
MNB-V1	Cooling Only	3	—	—
MNB-V2	Deluxe	3	1	3

Provides flow balancing for networked and standalone VAV controllers. Features include:

- Local network control.
- Damper and fan adjustment.
- Setpoint monitoring and adjustment.
- Flow validation and calibration (1, 2, or 3 point calibration).
- Sequence, calibration, and control setpoint logs.

Communications

BACnet Networks

The TAC MicroNet BACnet VAV controllers incorporate an isolated RS-485 transceiver for BACnet MS/TP communications at 9.6 up to 76.8 kbaud using standard MS/TP wiring methods. Up to 128 TAC MicroNet BACnet controllers can be connected to an MS/TP sub-net without repeaters.

S-Link

The Sensor Link (S-Link) communications wiring provides power and a communication interface for one MN-Sx TAC I/A Series MicroNet sensor. The various MN-Sx sensors can provide room temperature, room humidity, setpoint adjustment, and occupancy override. This connection uses two-wire, unshielded cable and is not polarity sensitive. Maximum S-Link bus length is 200 ft (61 m).

BACnet Compliance


BACnet Application Specific Controller (B-ASC).

Options

MNA-FLO-1	TAC MicroNet™ enclosure, used if wiring to flexible conduit is required
MNB-BAL	Flow Balance software
S-Link Sensors	Temperature and humidity wall sensors with digital communication



BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse, approve, or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a registered trademark of BI.

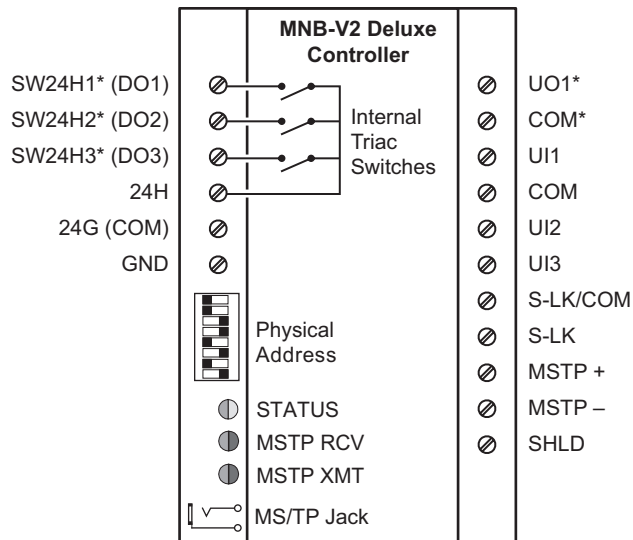

* Asterisks indicate terminals that apply to the MNB-V2 controller but not to the MNB-V1.

Figure-1 VAV Controller Terminals.

SPECIFICATIONS

HARDWARE SPECIFICATIONS

Dimensions

7-3/4 H x 6-1/4 W x 2-1/2 D in
(197 x 159 x 63 mm).

Enclosure

Conforms to NEMA-1. Meets UL 94-5V flammability ratings for plenum application use.

Mounting

Shaft mount.

Power Supply Input

20.4 to 30 Vac, 50/60 Hz.

Power Consumption

15 VA at 24 Vac plus DO loads.

AGENCY LISTINGS

US

UL 916, File #E9429 Category PAZX
FCC Part 15, Class A.

Canadian

UL Listed to Canadian Safety Standards
(CAN/CSA 22.2).

Australian

Meets requirements to bear the C-Tick
Mark.

BTL Listed

B-ASC

European Community

EMC Directive 89/336/EEC
EN61326

AMBIENT LIMITS

Operating Temperature

32 to 131 °F (0 to 55 °C).

Shipping and Storage Temperature

-40 to 160 °F (-40 to 71 °C).

Humidity

5 to 95% non-condensing.

WIRING TERMINALS (FIGURE-1)

Fixed Screw terminals

single AWG #14 (2.08 mm²) wire or
up to two AWG #18 (0.823 mm²) or
smaller wires.

VELOCITY PRESSURE INPUT

Control Range

0.004 to 1.5 in. of W.C.

Over Pressure Withstand

±20 in. of W.C.

Accuracy

±5% at 1.00 in. of W.C. with laminar
flow at 77 °F (25 °C) and suitable flow
station.

Sensor Type

Self-calibrating flow sensor (differential
pressure).

Tubing Connections

Barb fittings for 0.170 in. I.D.
FRPE polyethylene tubing or 1/4"
O.D./0.125" I.D. Tygon® tubing (high
and low pressure taps).

Tubing Length

5 ft. (1.52 m) maximum, each tube.

INPUTS FROM MN-SX TAC MICRONET™ SENSOR

Space Temperature

32 to 122 °F (0 to 50 °C).

Space Humidity

5 to 95% RH, non-condensing.

Local Setpoint

Adjustable within limits set by
application programming tool.

Override Pushbutton

For standalone occupancy control or
occupancy override.

Fan Operation and Speed Mode

On/off, speed (low/medium/high), or
auto.

System Mode

Heat, cool, off, or auto.

Emergency Heat

Enable or disable.

UNIVERSAL INPUTS (3)

Universal Input characteristics are
software-configured to respond to one
of the following input types:

10 k ohm Thermistor with 11 k ohm Shunt Resistor

Sensor operating range -40 to 250 °F
(-40 to 121 °C), TAC model TSMN-
57011-850, TS-5700-850 series, or
equivalent.

1 k ohm Balco

-40 to 250 °F (-40 to 121 °C), TAC
model TSMN-81011, TS-8000 series, or
equivalent.

1 k ohm Platinum

-40 to 240 °F (-40 to 116 °C), TAC
model TSMN-58011, TS-5800 series, or
equivalent.

1 k ohm Resistive

0 to 1500 ohms.

10 k ohm Resistive

0 to 10.5 k ohms.

Analog Voltage

Range 0 to 5 Vdc.

Analog Current

Range 0 to 20 mA, requires external
250 ohm shunt resistor (AD-8969-202).

Digital

Dry switched contact; detection of
closed switch requires less than 300
ohms resistance; detection of open
switch requires more than 1.5 k ohms.

Standard Pulse Input

Minimum Rate

1 pulse per 4 minutes.

Maximum Rate

1 pulse per second.

ACTUATOR OUTPUTS

Torque Rating

53 lb-in. (6 N-m).

Stroke

Fully adjustable from 0° to 90°.

Timing

Approximately 3 minutes at 60 Hz (3.6
minutes at 50 Hz) for 90° rotation at 24
Vac.

Position Indication

Provides a visual indication of position.

Manual Override

Pushbutton to allow manual positioning
of the damper.

Damper Linkage

1/2 in. (12.75 mm) or 3/8 in. (9.5 mm)
diameter round shaft extending 7/8 in.
(22.23 mm) minimum from terminal
box. 3/8 in. (9.5 mm) diameter shaft
requires AM-135 adapter kit.

DIGITAL OUTPUTS – TRIAC

DO1 plus DO2 Rating

24 VA total at 24 Vac, 50/60 Hz, high
side switching.

DO3 Rating

12 VA at 24 Vac, 50/60 Hz, high side
switching.

UNIVERSAL OUTPUT

0 to 20 mA

Output load from 80 to 550 ohms.

0 to 10 V

With external 500 ohms, 1/2 W, 1%
resistor.

Capable of Driving Functional Devices

RIBUI1C Relay

UO configured for 0 to 20 mAdc, no
external resistor.

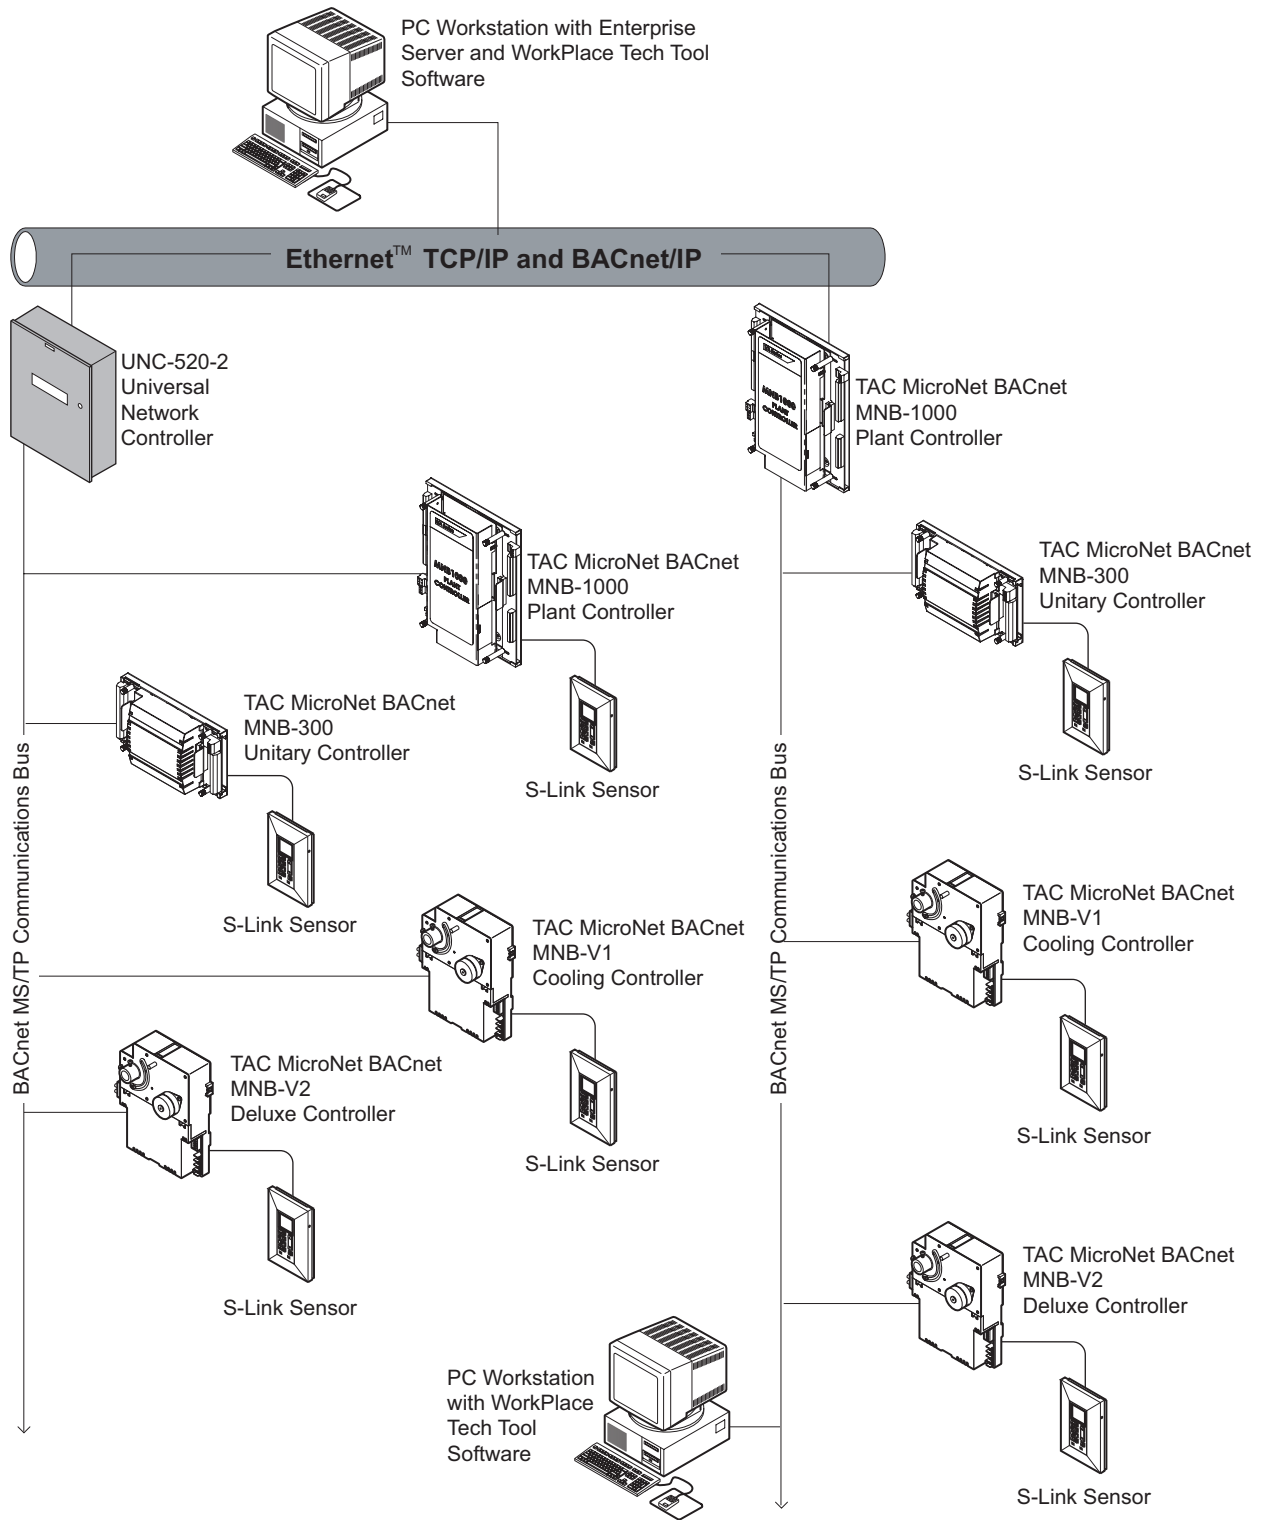


Figure-2 TAC I/A Series BACnet Topology.

Copyright © 2006, TAC
 All brand names, trademarks and registered trademarks are the property of their respective owners. Information contained within this document is subject to change without notice. All rights reserved.

TAC
 1354 Clifford Avenue
 PO Box 2940
 Loves Park, IL 61132-2940

www.tac.com

Distributed, manufactured, and sold by TAC. I/A Series trademarks are owned by Invensys Systems, Inc. and are used on this product under master license from Invensys. Invensys does not manufacture this product or provide any product warranty or support. For service, support, and warranty information, contact TAC at 1-888-444-1311.

F-27340-1

